



leplae Alarmsystemen

Vergunde onderneming voor alarm-en camerasystemen-BE680.239.521




Incert nummer: B- 1692

Hooiweg 16c
2222 Itegem
e-mail: info@leplae-alarmsystemen.be


T: 0495/103901

Gebruiksaanwijzing voor Smart PSS


A. www.leplae-alarmsystemen.be

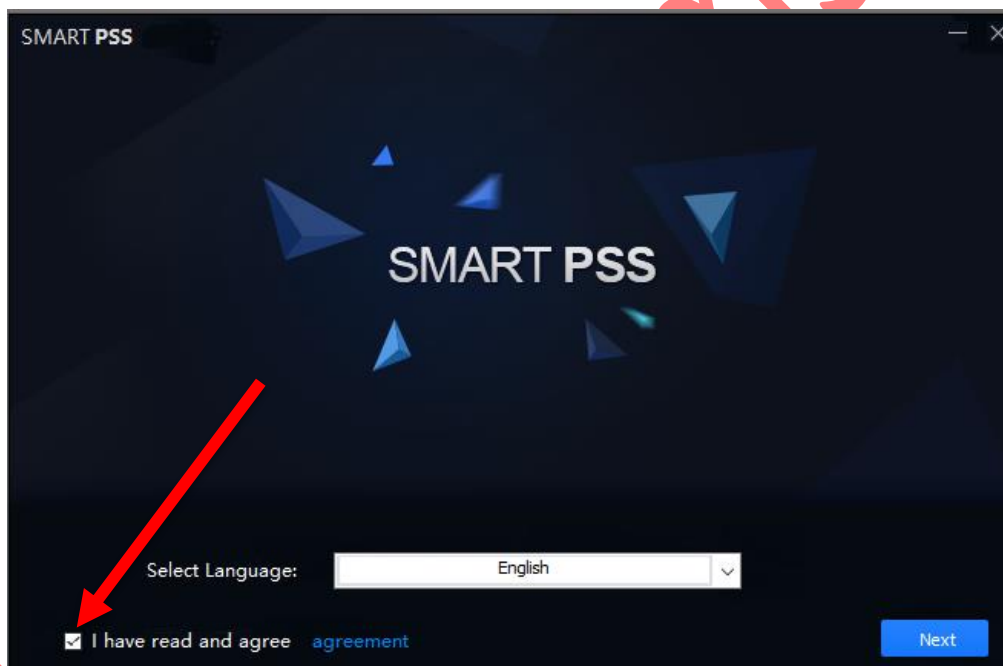

B

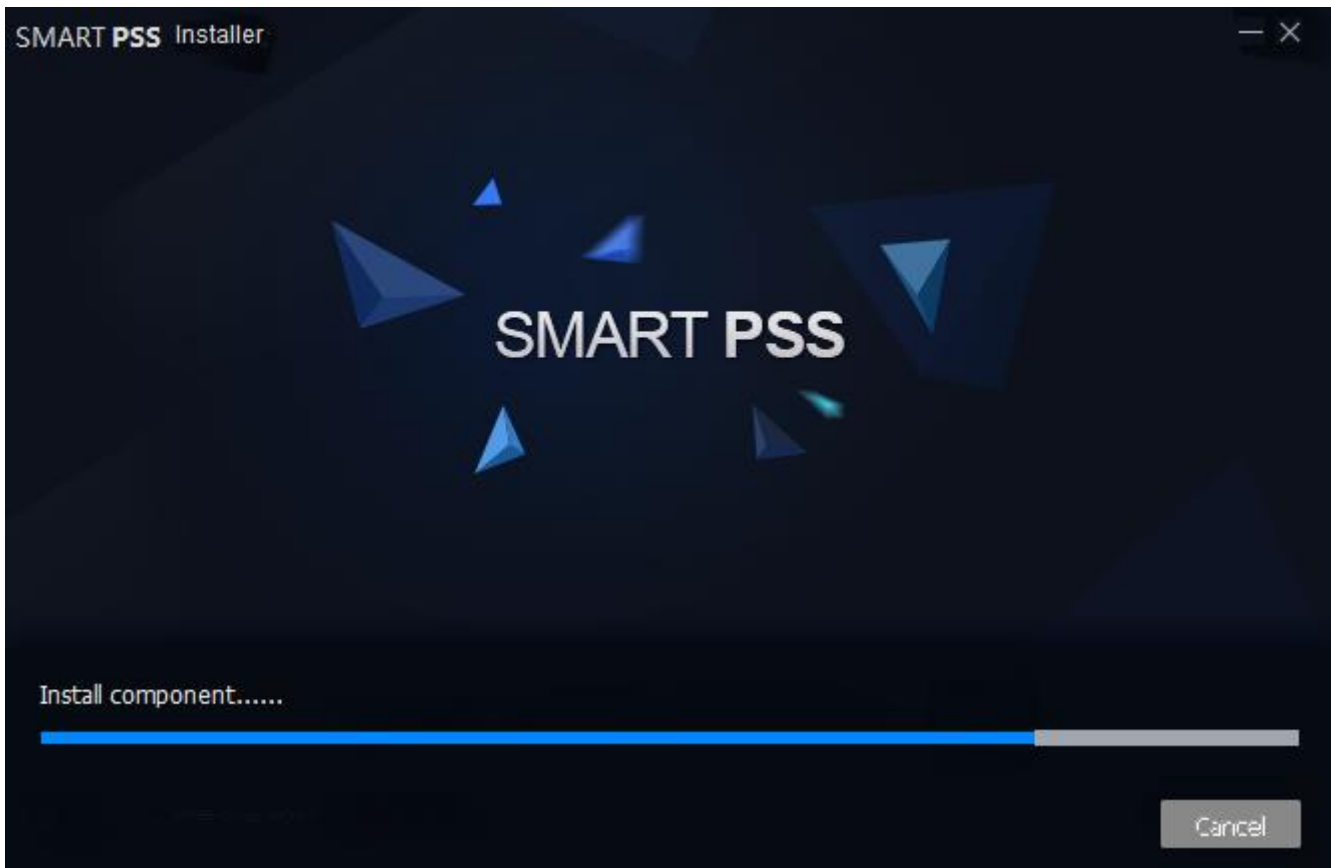

C

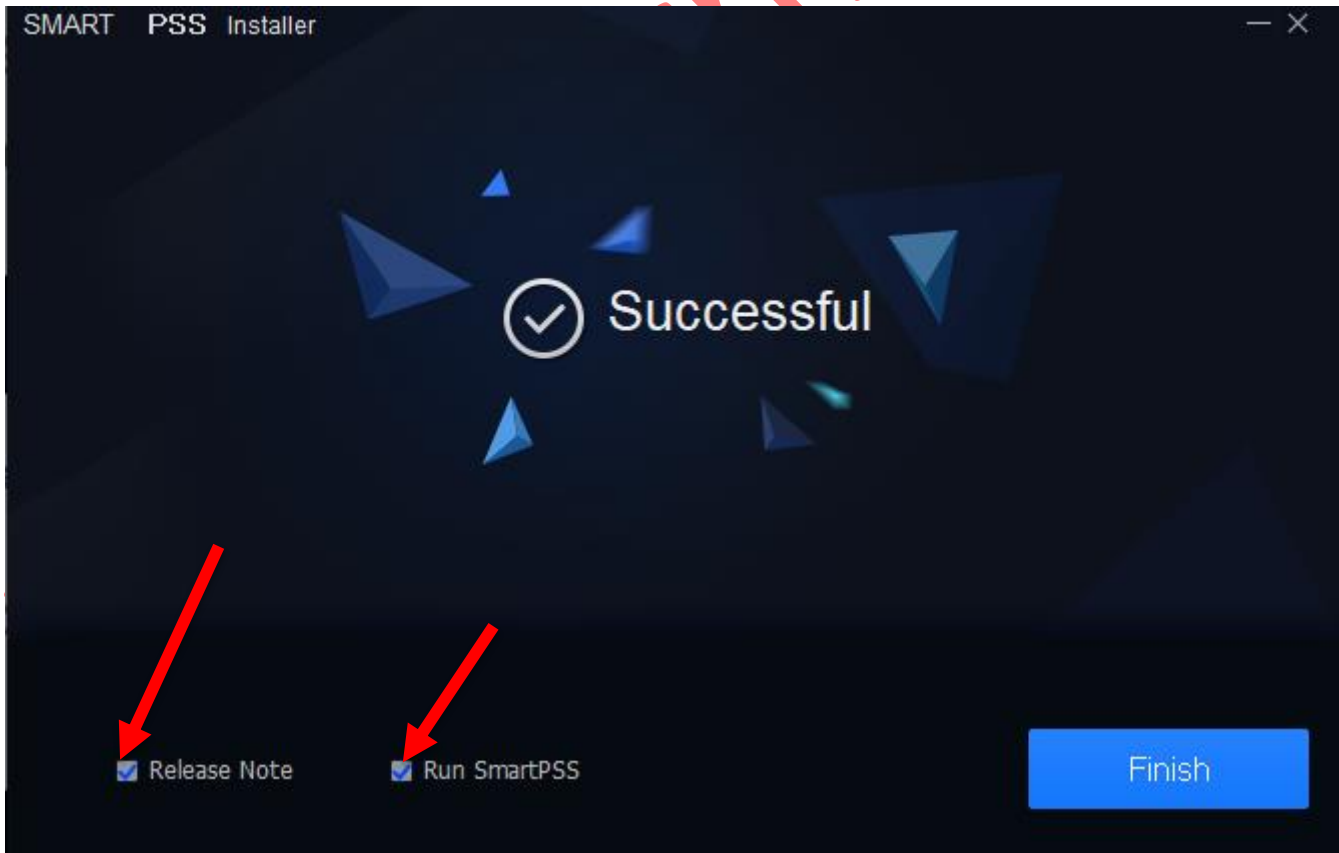

D

Initialization ✕

1.Password Setting 2.Password Protection

⚠ Please set admin password at first installation!

Password

Password Strength

Confirm Password

Auto Login after Registration

Next Cancel

E

Initialization ✕

1.Password Setting 2.Password Protection

⚠ Please set admin password at first installation!

Password

Password Strength

Confirm Password

Auto Login after Registration

Next Cancel

F

Initialization ✕

1.Password Setting 2.Password Protection

! Please set security questions!

Question 1

Answer

Question 2

Answer

Question 3

Answer

Finish

G

SMART PSS Devices New +

All Device

<input type="checkbox"/>	No.	Name ▲	IP/Domain Name	Device
--------------------------	-----	--------	----------------	--------

H

Manual Add ✕

Device Name: *

Method to add: IP/Domain ▾

IP/Domain Name: *

Port: * 37777

Group Name: Default Group ▾

User Name: *

Password:

I

Manual Add ✕

Device Name: * camera's

Method to add: SN(For Device Support P2P) ▾

SN: * 4J0396BPA

Group Name: Default Group ▾

User Name: * admin

Password:

J

SMART PSS Devices New +

Auto Search + Add Delete Import Export


All Device

No.	Name	IP/Domain Name	Device Type	Device Model	Port	Channel Number	Online St
1	camera's	4J0396BPAZDEBD5	N/A	N/A	N/A	N/A	Onli


K

SMART PSS New +


Operation




Live View




Access



Video Wall



Event



Attendance

L


SMART PSS Live View(1) +

Organizations

Search...

- Default Group
 - camera's

M

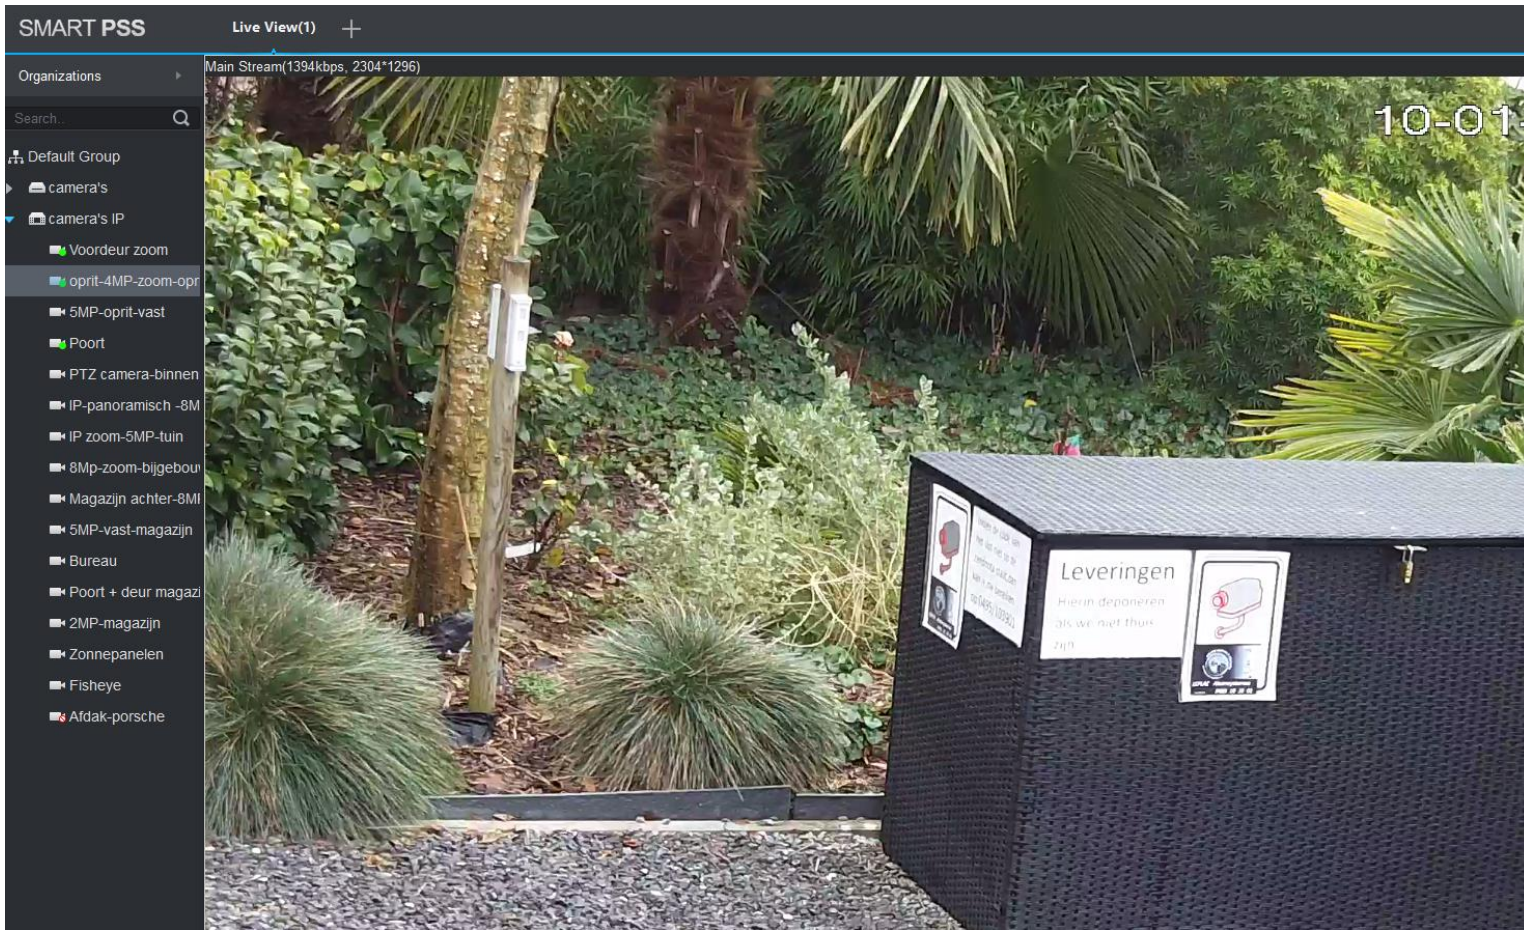

N

Leplae Alarm

1. Surf naar www.leplae-alarmsystemen.be
2. Klik vervolgens op “software”
 - A. Klik op het juiste programma.
 - B. Vink ”I have read and agree” aan en klik op next
 - C. De pc installeert het programma
 - D. Vink de 2 icoontjes aan en klik op finish
 - E. Geef bij password een paswoord in.....

Bij” Confirm pasword “geef je nogmaals het paswoord in en klik vervolgens “Auto Login after Registration” aan
 - F. Klik vervolgens op Next
 - G. Vul de vragenlijst in en klik op finish
 - H. Klik op “Add”
 - I. Geef bij Device name een willekeurige naam is, bijvoorbeeld ‘camera’.

Vreemde tekens aanvaard hij niet.
 - J. Klik bij “method to add”, op SN(=serienummer)

Geef vervolgens het serienummer in. Let wel, 0 zijn nullen.
Bij User name geef je admin in.
Het paswoord heb je bij de installatie gekregen. Die staat ook op het opnametoestel.
 - K. Het ledje moet groen worden. Blijft die op offline staan, dan is het serienummer of paswoord niet correct ingegeven.

En klik vervolgens boven” devices “op het kruisje.
 - L. Om beelden te zien, dien je op “Live View” te klikken.
 - M. Sleep vervolgens camera’s(of de naam dat u ingaf voor je systeem) naar rechts, met de muis, en laat de linkermuisknop los
 - N. Nu kan je de beelden zien.